



SC5


Relays

PCB Power Relay

This document is a property of Evolute Solutions Pvt. Ltd. This is a completely confidential document and cannot be copied, duplicated or re-distributed without permission from the owner. Evolute holds the right to change the specifications without prior notice. All Rights Reserved.

Prepared By	Approved By	Customer Approval
		Signature with Company Seal

Kindly return this datasheet to us with your signature and company seal within two months, or we will consider the document to be accepted by you.

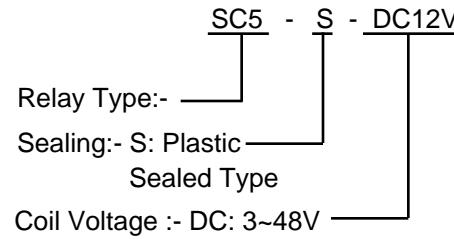

leOne™
Econo

Model	SC5				
Features	Dimension L * W * H (mm)	19 * 15.5 * 15.5			
	Terminal Type	PCB			
	Weight	10.5 gm Approximately			
Contact Data	Contact Form	1C			
	Contact Material	Ag Alloy			
	Contact Capacity	7A @240VAC 10A @125VAC			
Coil Data	Coil Voltage	3 VDC ~ 48 VDC			
	Coil Power Consumption	0.36W			
	Coil Specification	Coil Voltage	Coil Resistance (Ω) ±10%	Pull in Voltage Max.(VDC)	Drop Out Voltage Min. (VDC)
		3VDC	25	80 %	5 %
		5VDC	70	80 %	5 %
		6VDC	100	80 %	5 %
		9VDC	225	80 %	5 %
		12VDC	400	80 %	5 %
		24VDC	1600	80 %	5 %
		48VDC	6400	80 %	5 %
General Data	Dielectric Strength	750 VAC @ 50 Hz / Min (Between open Contacts)			
		1500 VAC @ 50 Hz / Min (Between Coil & Contacts)			
	Insulation Resistance	100 MΩ			
	Electrical Life	1 x 10 ⁵			
	Mechanical Life	1 x 10 ⁷			
	Operating Temperature	- 40°C ~ + 70°C			
Dimension					
Application	UPS, Invertor, A/C Microwave, Vending Machine, Timers, SMPS, Card Reader etc.				