

LMI2-T


Relays

General Control (PCB Relay)

This document is a property of Evolute Solutions Pvt. Ltd. This is a completely confidential document and cannot be copied, duplicated or re-distributed without permission from the owner. Evolute holds the right to change the specifications without prior notice. All Rights Reserved.

Prepared By	Approved By	Customer Approval
		Signature with Company Seal

Kindly return this datasheet to us with your signature and company seal within two months, or we will consider the document to be accepted by you.

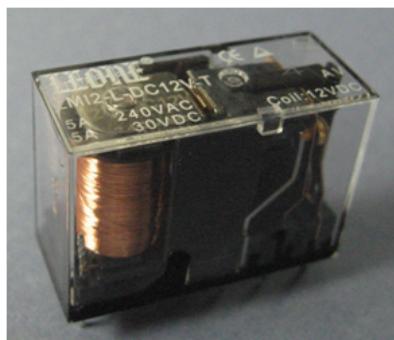


LMI2 - L - DC5V - T

Relay Type:- _____

Coil Type:- L: High Sensitive: 0.53W

Coil Voltage:- 3 ~ 48VDC _____

Transparent _____

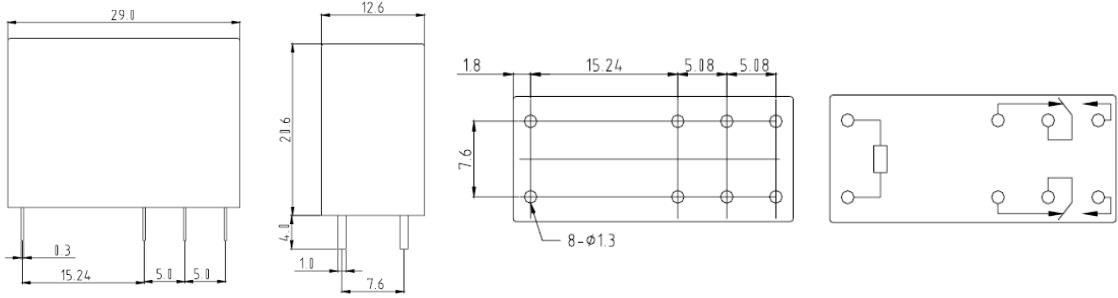Model		LMI2-T							
Features	Dimension L * W * H (mm)	29 * 12.6 * 20.6							
	Terminal Type	PCB							
	Weight	13 gm Approximately							
Contact Data	Contact Form	2C							
	Contact Material	Ag Alloy							
	Contact Capacity	5A @240VAC / 5A @30VDC							
	Contact Resistance	100mΩ Max. (at 1A / 6VDC)							
Coil Data	Coil Voltage	3 ~ 48VDC							
	Coil Power Consumption	0.53W							
	Coil Specification	Coil Voltage	Coil Resistance (Ω) ±10%	Pull in Voltage Max. (VDC)	Drop Out Voltage Min. (VDC)				
		5VDC	50	80 %	5 %				
		12VDC	270	80 %	5 %				
		24VDC	1100	80 %	5 %				
General Data	Dielectric Strength	1000VAC (Between open Contacts)							
		5000VAC (Between coil & Contacts)							
	Insulation Resistance	100MΩ 500VDC							
	Electrical Life	1 x 10 ⁵							
	Mechanical Life	1 x 10 ⁷							
	Operating Temperature	-30 °C to + 70 °C							
Dimension									
Application	Television, Stereo, Microwave, Air Conditioner, Refrigerator, Iron, Electrical Boiler, Satellite Receiver, etc.								