



18N50

Preliminary

Power MOSFET

18 Amps, 500 Volts N-CHANNEL POWER MOSFET

DESCRIPTION

The UTC **18N50** is an N-channel enhancement mode Power MOSFET using UTC's advanced planar stripe and DMOS technology to provide perfect performance.



This technology can withstand high energy pulse in the avalanche and commutation mode. It can provide minimum on-state resistance and high switching speed.

This device is generally applied in active power factor correction and high efficient switched mode power supplies.

FEATURES

- * 18A, 500V, $R_{DS(ON)}=0.265\Omega$ @ $V_{GS}=10V$
- * High switching speed
- * Typically 45nC low gate charge
- * 100% avalanche tested
- * Typically 25pF low C_{RSS}
- * Improved dv/dt capability

SYMBOL

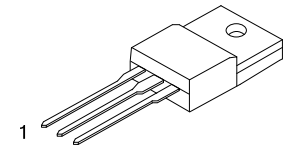

TO-220F1

ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
18N50L-TF1-T	18N50G-TF1-T	TO-220F1	G	D	S	Tube

Note: Pin Assignment: G: Gate D: Drain S: Source

18N50L - TF1 - T (1) Packing Type (2) Package Type (3) Lead Free	(1) T: Tube (2) TF1: TO-220F1 (3) G: Halogen Free, L: Lead Free
--	--

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	RATINGS	UNIT
Drain to Source Voltage		V_{DSS}	500	V
Gate to Source Voltage		V_{GSS}	± 30	V
Drain Current	Continuous	I_D	18	A
	Pulsed (Note 1)	I_{DM}	72 (Note 6)	A
Avalanche Energy	Single Pulsed (Note 2)	E_{AS}	945	mJ
	Repetitive (Note 1)	E_{AR}	23.5	mJ
Avalanche Current (Note 1)		I_{AR}	18	A
Peak Diode Recovery dv/dt (Note 3)		dv/dt	4.5	V/ns
Power Dissipation		P_D	38.5	W
Junction Temperature		T_J	+150	°C
Storage Temperature		T_{STG}	-55 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
 Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	62.5	°C/W
Junction to Case	θ_{JC}	3.3	°C/W

■ ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	V _{GS} =0V, I _D =250μA	500			V
Breakdown Voltage Temperature Coefficient		ΔBV _{DSS} /ΔT _J	I _D =250μA, Referenced to 25°C		0.5		V/°C
Drain-Source Leakage Current		I _{DSS}	V _{DS} =500V, V _{GS} =0V			1	μA
			V _{DS} =400V, T _C =125°C			10	μA
Gate-Source Leakage Current	Forward	I _{GSS}	V _{GS} = 30 V, V _{DS} = 0 V			100	nA
	Reverse		V _{GS} = -30 V, V _{DS} = 0 V			-100	
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	V _{DS} =V _{GS} , I _D =250μA	2.0		4.0	V
Drain-Source On-State Resistance		R _{DS(ON)}	V _{GS} =10V, I _D =9A		0.220	0.265	Ω
Forward Transconductance		g _{FS}	V _{DS} =40V, I _D =9A (Note 4)		25		S
DYNAMIC PARAMETERS							
Input Capacitance		C _{ISS}	V _{DS} =25V, V _{GS} =0V, f=1.0MHz		2200	2860	pF
Output Capacitance		C _{OSS}			330	430	pF
Reverse Transfer Capacitance		C _{RSS}			25	40	pF
SWITCHING PARAMETERS							
Total Gate Charge		Q _G	V _{DS} =400V, V _{GS} =10V, I _D =18A (Note 4,5)		45	60	nC
Gate-Source Charge		Q _{GS}			12.5		nC
Gate-Drain Charge		Q _{GD}			19		nC
Turn-ON Delay Time		t _{D(ON)}	V _{DD} =250V, I _D =18A, R _G =25Ω (Note 4,5)		55	120	ns
Turn-ON Rise Time		t _R			165	340	ns
Turn-OFF Delay Time		t _{D(OFF)}			95	200	ns
Turn-OFF Fall Time		t _F			90	190	ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I _S				18	A
Maximum Body-Diode Pulsed Current		I _{SM}				72	A
Drain-Source Diode Forward Voltage		V _{SD}	I _S =18A, V _{GS} =0V			1.4	V
Body Diode Reverse Recovery Time		t _{RR}	V _{GS} =0V, I _S =18A,		500		ns
Body Diode Reverse Recovery Charge		Q _{RR}	dI _F /dt=100A/μs (Note 4)		5.4		μC

Notes : 1. Repetitive Rating: Pulse width limited by maximum junction temperature

2. $L=5.2\text{mH}$, $I_{AS}=18A$, $V_{DD}=50V$, $R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$

4. $I_{SD} \leq 18A$, $di/dt \leq 200A/\mu s$, $V_{DD} \leq BV_{DSS}$, Starting $T_J=25^\circ\text{C}$



4. Pulse Test : Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$

5. Essentially independent of operating temperature

6. Drain current limited by maximum junction temperature


■ TEST CIRCUITS AND WAVEFORMS

Peak Diode Recovery dv/dt Test Circuit & Waveforms

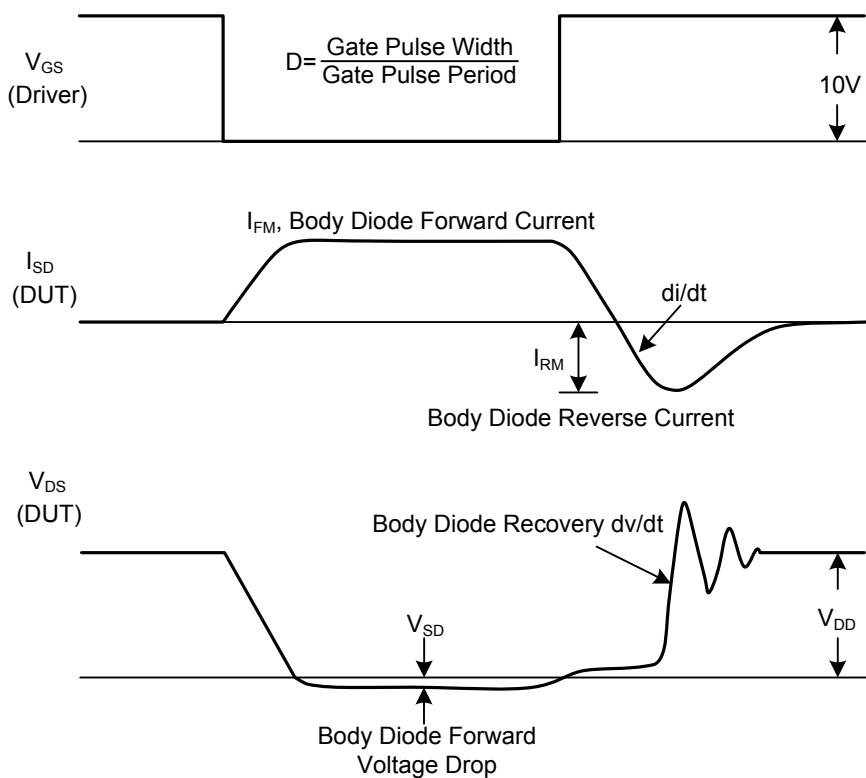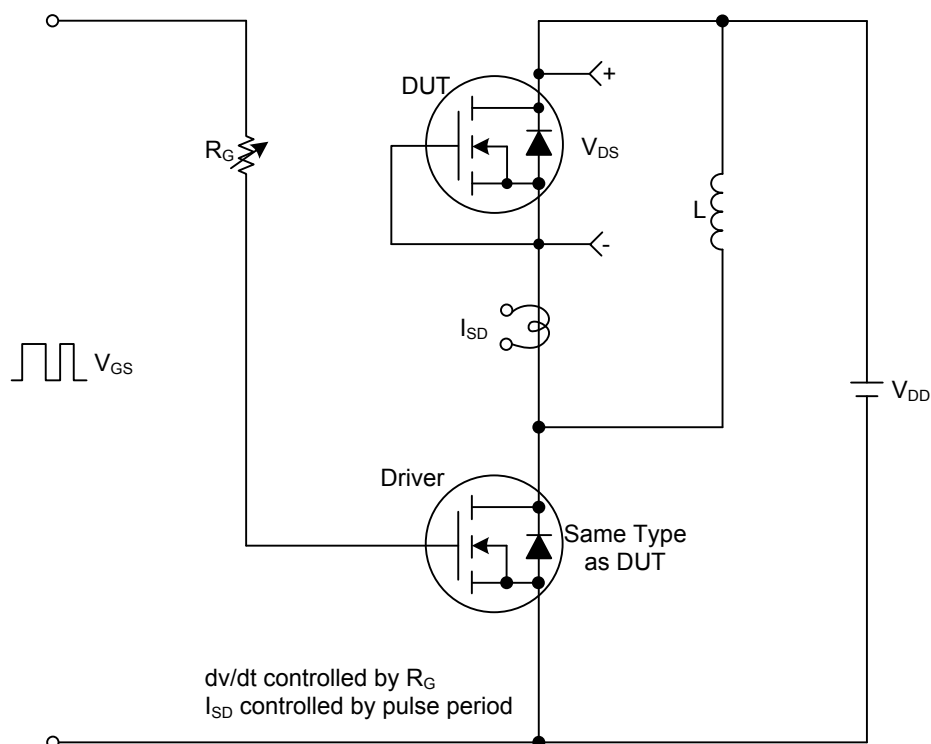


■ TEST CIRCUITS AND WAVEFORMS(Cont.)


Gate Charge Test Circuit

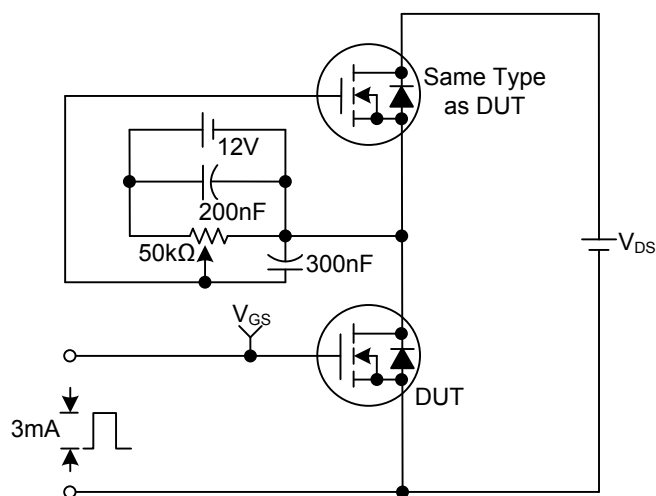


Gate Charge Waveforms

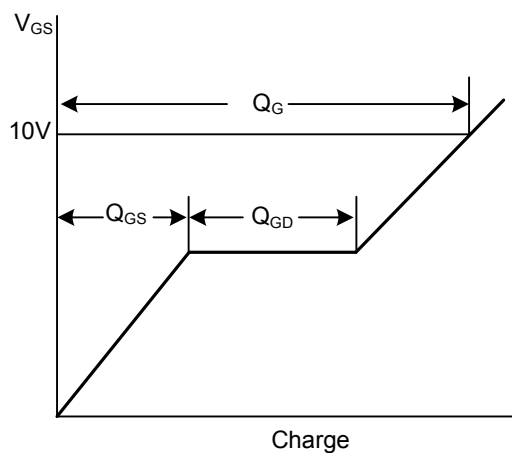


Resistive Switching Test Circuit

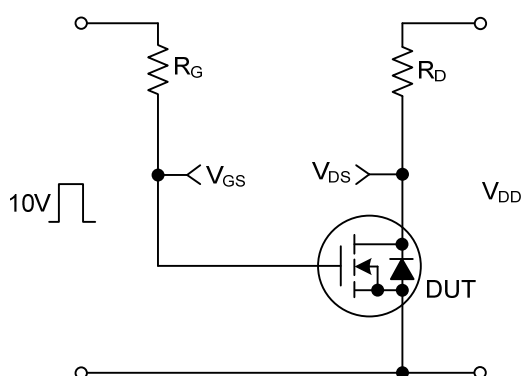


Resistive Switching Waveforms

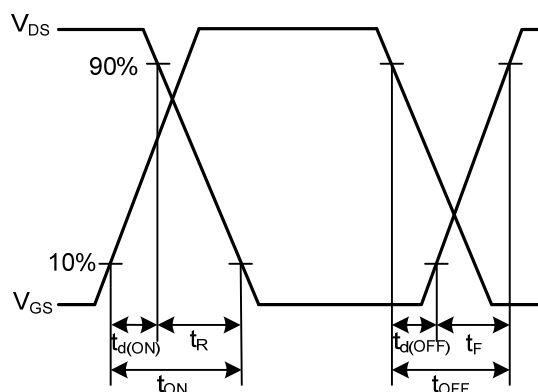

Unclamped Inductive Switching Test Circuit

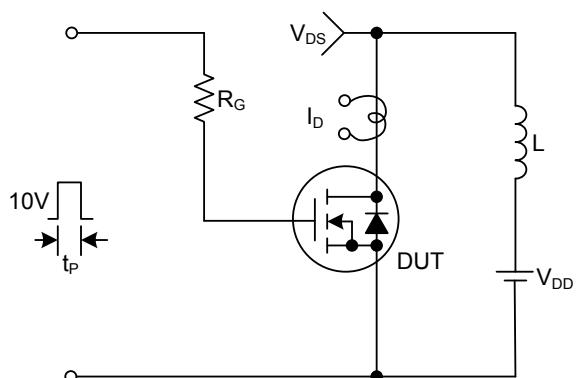

Unclamped Inductive Switching Waveforms

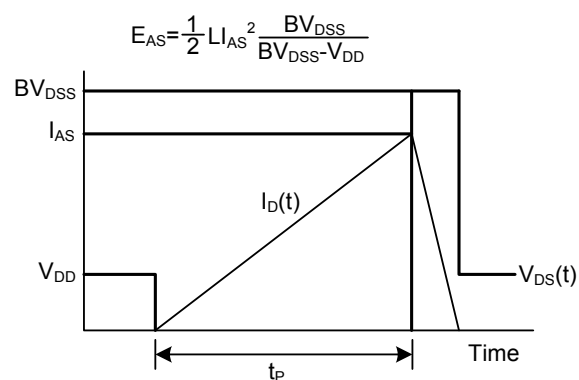

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.