

# Relay Modules/PLC Output Amplified Board

## JR-2L1/24VDC



### ◆ Features

- Standard DIN rain mounted
- Status indication for each input
- Special circuit for self anti-interference
- Isolation for each relay channel
- with relay base, easy to replace





### ◆ Typical Applications

- Micro-controller
- PLC control
- Servo System
- Electro-magnetic valve
- DC Motors
- Home intelligent control

### ◆ Technical date

Model	JR-2L 1/24VDC
Output type	OMRON Relay
I/O points	2
Input signal	NPN and PNP compatible
Input voltage	DC24V * DC5V,DC 12V,AC 110V,AC220V can be customized.
Output voltage	AC/DC 0-250V
Output Contacts	1CO(SPDT)
Contact capacity(resistive)	10A 250VAC
Operation voltage/Release voltage	$\geq 75\% U_n / \leq 10\% U_n$
Operation time/Release time	$\leq 15ms / \leq 8ms$
Switching frequency	0.1Hz
Dimensions(WxH)	87*63mm
Mounting	DIN rail

### ◆ Wiring Diagram

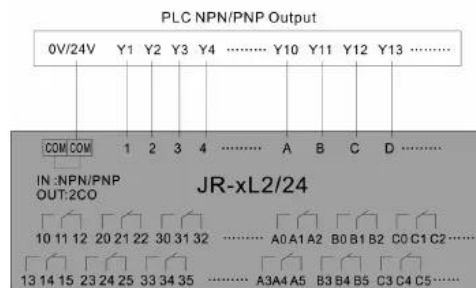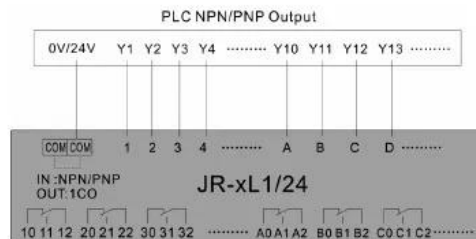

\* Please contact us for further information.